

	DONGFENG CUMMINS ENGINE PERFORMANCE CURVE	Engine Model <b>L300-20</b>	Curve No. <b>FR92013</b>	
			CPL Code <b>1480</b>	Date <b>20-June</b>


Displacement: 8.9L	Advertised Power:221kW@2200 rpm
Bore: 114mm	300HP@2200 rpm
Stroke: 145mm	Peak Torque: 1180N.m@1400 rpm
Fuel System: Boxu7100 Pump/RQV-K	Aspiration: Turbocharged & Inter-cooled
Cylinders: 6 Cylinders, in Line	Rating Type: Continuous

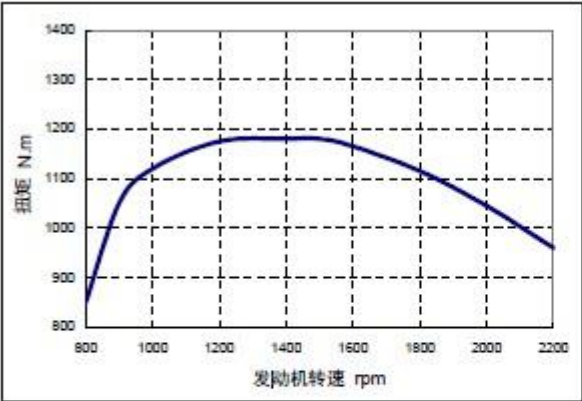

扭矩	
rpm	N.m
800	850
900	1050
1000	1120
1200	1175
1400	1180
1500	1180
1600	1165
1800	1115
2000	1045
2200	960

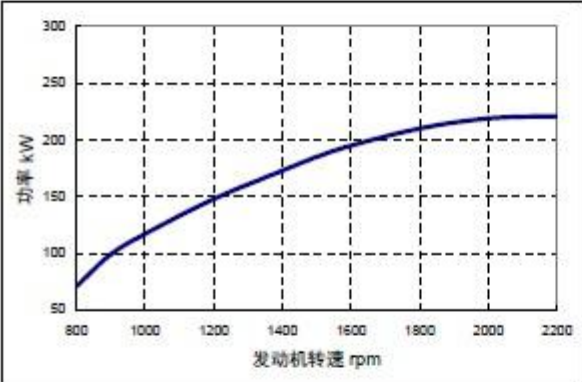

功率	
rpm	kW
800	71
900	99
1000	117
1200	148
1400	173
1500	185
1600	195
1800	210
2000	219
2200	221

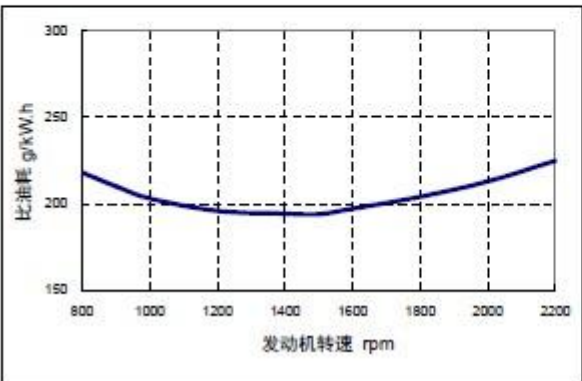

比油耗	
rpm	g/kW.h
800	215
900	206
1000	204
1200	196
1400	193
1500	194
1600	196
1800	202
2000	211
2200	225

Performance data obtain under normal conditions, according to GB/T18297-2001 test conditions

# Cummins Engine Co. Ltd

Diesel Engine for Vehicle Performance Data

## Technical Request

Aspiration:	Turbocharged & Inter-cooled
Emission Certification	GB17691/GB14761
Net Weight(Dry)-Engine Only-Average:	650kg
Net Weight(Dry)-Engine with Heat Exchanger-Average	680kg
Compression Ratio:	16.6:1
Distance from Center of Gravity to the Front Engine Block	427mm
Distance from Center of Gravity to the Crankshaft Centerline	163mm
Maximum Bending Moment at Rear Face of Block	1356 N.m
Limit load of Thrust Bearing:	
Instantaneous maximum:	5338 N
Continuous maximum	2670N
<b>Performance Characteristic</b>	
Idle Speed:	700±100rpm
Maximum non-load speed:	2500rpm
Over speed performance(within 15 seconds):	3500rpm
Maximum Altitude at Continuous Operation:	2000m
The clutch torque @ 800rpm:	780N.m
When install exhaust braking:	
The limit exhaust pressure of Turbocharger export @3150 rpm	450 kPa
Maximum power of Exhaust brake	114kw

Engine Speed (RPM)	Oil Pressure (kPa)	Air Flow (m3/min)	Air Pressurized		Exhaust Flow (m3/min)	Exhaust Temperature (°C)	Fuel Consumption (l/hr)	Heat Energy Loss	
			Flow (kg/min)	Pressure kPa				Coolant (KW)	Air (KW)
2200	426	20.3	—	168	55	470	60	99.8	63
1400	327	10.8	—	130	34	485	41.2	65.2	27

All values within ±5%.

# Cummins Engine Co. Ltd

Diesel Engine for Vehicle Performance Data

## LUBRICATION SYSTEM

Oil Sump Capacity:

Upper Limit:	23L
Lower Limit:	19L
Capacity of the whole system:	27.6 L

## AIR SYSTEM

Air intake maximum temperature rise from Outside to the Turbocharger 15°C

The allowable maximum restriction when use Dry Air Filter

Medium: kPa (mmH<sub>2</sub>O) 2.9(300)

Heavy: kPa (mmH<sub>2</sub>O) 3.7(380)

The allowable maximum restriction when use dirty Filter Element: kPa (mmH<sub>2</sub>O) 6.2(635)

## TURBOCHARGED & INTERCOOLED

Environment design parameters	Stage II	Stage III
The highest temperature of intake manifold:	55°C	50°C
Temperature after the cooling of the intercooler	25°C	20°C
The maximum allowable cold pressure difference before and after the intercooler:	16.7(125) kPa(mmHg)	
The allowable minimum diameter of the intake manifold:	100mm	

## EXHAUST SYSTEM

The maximum exhaust resistance with exhaust manifold and muffler: kPa(mmHg) 10.0(75)

The allowable minimum diameter of the exhaust manifold: 75mm

## FUEL SYSTEM

The maximum resistance of Fuel Pump when use clean filter	150mmHg
Maximum fuel return oil resistance:	520mmHg

## COOLING SYSTEM

Engine Coolant Capacity:	11.1 L
The range of temperature adjustment for the Thermostat:	83-93 °C
The maximum pressure of Coolant(without pressure cap and thermostat closed)	290kPa
The highest coolant temperature (at engine exports):	100°C
Maximum degassing time	25mins
Maximum coolant flow to accessories	56 L/min
The lowest coolant temperature	70°C
Minimum speed of water-filling	19 l/min
Minimum coolant expansion volume relative to the system capacity	6 %
Water tank capacity without water expansion	6 L

---

Minimum allows pressure of pressure cap:	50 kPa	
The alarm temperature of the coolant	104°C	
The open temperature of louver	N/A	
Cooling ability of cooling system:	Stage II	Stage III
The limit environmental temperature at rated speed	45 °C	42 °C
The limit environmental temperature at peak torque	40°C	37°C

#### 24V ELECTRICAL SYSTEM

Maximum resistance of starting circuit	0.002Ω
The cold start current when engine and the clutch separate: CCA	510

#### COLD STARTING SYSTEM

The lowest cold starting temperature without auxiliary starting device	-10°C @120rpm
The lowest cold starting temperature with starting device	-25°C@ 110rpm

*Cummins Engine Co. Ltd*

*All data is subject to change without notice- contact Cummins for most recent data.*