



CHONGQING CUMMINS ENGINE PERFORMANCE CURVE

Engine Model
NTA855-G1B

Curve No.
C-819E

Rev
00

CPL Code
1183



Data Sheet
DS-819E

Description
PD-819E

Date
2007-1-25

Displacement: **14L** [855 in.³] Cylinders: **6** Fuel System: **PT**
Bore: **140mm** [5.50 in.] Speed: **1500 r/min** Cfg. Number: **D093517DX02**
Stroke: **152mm** [6.00in.] Aspiration: **Turbocharged & Aftercooled**

Standby Power		Prime Power		Continuous Power	
kW	HP	kW	HP	kW	HP
321	430	284	380		

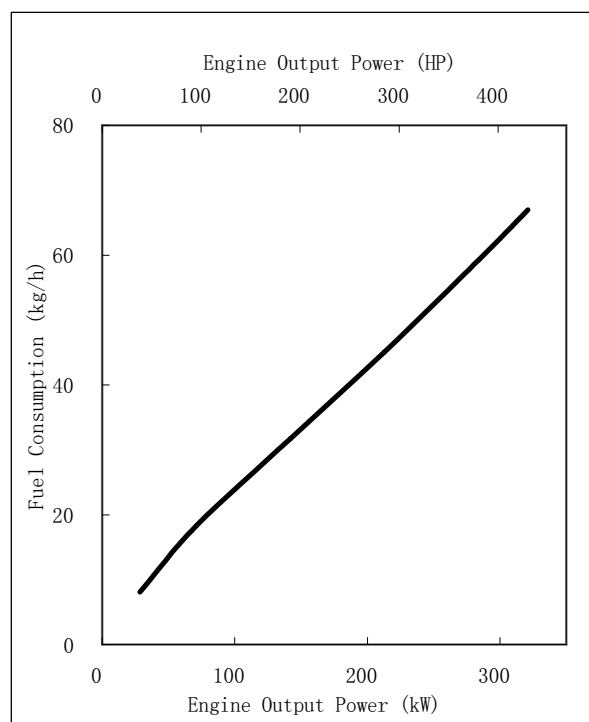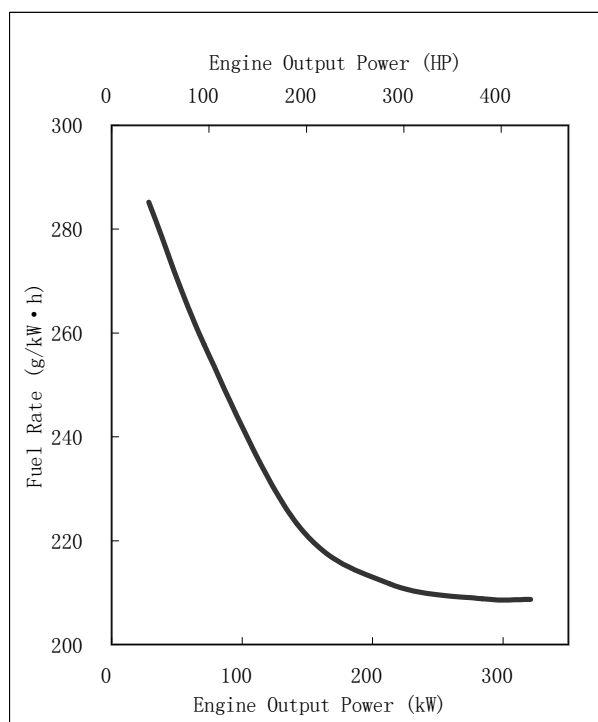

	Output Power		Fuel Consumption		Fuel Rate
	HP	kW	kg/h	L/h	g/kW-h
110%	430	321	67.0	80.7	208.7
100%	380	284	59.3	71.4	208.8
75%	285	213	45.1	54.3	211.7
50%	190	142	31.7	38.2	223.2
25%	95	71	18.3	22.0	257.7
10%	38	28	8.1	9.8	285.2

All data is based on :

--Engine Operating with fuel system, water pump, lubricating oil pump, air cleaner and exhaust silencer, fan, and optional driven components.

--Engine operating with fuel corresponding to grade No.2-D per ASTM D975.

--ISO 3046, Part1, Standard Reference Conditions of : Barometric Pressure:100kPa(29.5in.Hg); Altitude: 110m (361ft.); Air Temperature: 25°C (77°F) ; Relative Humidity: 30% .

All Data is Subject to Change Without Notice - contact CCEC for latest data . Tel : 86-400-889-9990



Chongqing Cummins Engine Co. Ltd.

Engine Data Sheet

MODEL: NTA855-G1B
ONFIGURATION NO.: D093517DX02

DATA SHEET: DS-819E
PERFORMANCE CURVE: C-819E

CPL NUMBER: 1183

PRIME POWER 380 HP (284 kW) at 1500 r/min

DATE: 2007-1-25

STANDBY POWER: 430 HP (321 kW) at 1500 r/min

REVISION: 00

GENERAL ENGINE DATA

Type.....	4-Cycle;In-line;6-Cylinder	
Aspiration	Turbocharged,Aftercooled	
Bore x Stroke - in.×in. (mm×mm).....	5.5 ×6	(140 × 152)
Displacement - in. ³ (L).....	855	(14)
Compression Ratio	14.0:1	
Firing Order	1-5-3-6-2-4	
Dry Weight		
--Fan to Flywheel Engine - lb. (kg).....	2870	(1300)
--Heat Exchanger Cooled Engine - lb. (kg).....	3095	(1410)
Wet Weight		
--Fan to Flywheel Engine - lb. (kg).....	2970	(1350)
--Heat Exchanger Cooled Engine - lb. (kg).....	3320	(1510)
Moment of Inertia of Rotating Components - With FW1109 flywheel - lb.ft. ²	118.5	(4.99)
Center of Gravity from Rear Face of Flywheel Housing - in.(mm)	27.7	(704)
Center of Gravity Above Crankshaft Centerline - in.(mm)	5.5	(140)
Reference Installation Drawing		
--Fan to Flywheel Engine.....	4915105	
--Heat Exchanger Cooled Engine.....	4061315	

ENGINE MOUNTING

Maximum Allowable Bending Moment at Rear Face of Block - lb.·ft. (N·m) ..	1000	(1356)
---	------	----------

EXHAUST SYSTEM

Maximum Allowable Back Pressure - in.Hg (kPa).....	3.0	(10)
Standard Exhaust Pipe Diameter - in. (mm).....	5.0	(127)

AIR INDUCTION SYSTEM

Maximum Allowable Intake Air Restriction		
--With Clean Filter Element - in. H ₂ O (kPa).....	15	(3.74)
--With Dirty Filter Element - in. H ₂ O (kPa)	25	(6.22)
Minimum Dirt Holding Capacity - g/CFM (g/L/s).....	25	(53)
Maximum Allowable Intake Air Temperature ΔT - °F (°C).....	30	(17)

COOLING SYSTEM

Coolant Capacity - Engine Only - U.S. gal (L).....	5.5	(20.8)
- With Radiator - U.S. gal (L).....	16.0	(60.6)
- With Heat Exchanger - U.S. gal (L).....	13.0	(49.2)
Maximum Coolant Friction Head External to Engine - PSI (kPa).....	6	(41)
Maximum Static Head of Coolant (exclusive of Pressure Cap) - PSI (kPa) .	15	(103)
Maximum Static Head of Coolant Above Engine Crank Centerline -ft. (m) ..	46	(14.0)
Standard Thermostat (Modulating) Range - °F (°C)	180 - 202	(82 - 94)
Minimum Allowable Pressure Cap -PSI (kPa).....	7.0	(48.2)
Maximum Coolant Temperature - °F (°C).....	205	(96)
Maximum Allowable Top Tank Temperature for Standby / Prime Power - °F	220 / 212	(104 / 100)

Minimum Recommended Top Tank Temperature - °F (°C).....	160	(71)
Minimum Coolant Expansion Space - % of System Capacity	5	
Minimum Coolant Makeup Capacity - U.S. gal (L).....	1.1	(4.2)
Engine Water Flow - GPM (L/s)	79	(5)

Fan to Flywheel Engine

Recommended Standard Fan Diameter - in. (mm).....	34	(864)
Fan to Crankshaft Ratio.....	1.2	
Fan Speed - r/min.....	1800	
Fan Power - HP (kW).....	19.0	(14.2)
Standard Fan Air Flow - CFM (m ³ /s).....	25003	(11.8)

Heat Exchanger Cooled Engine

Raw Water Flow - GPM (L/s)	51.5	(3.25)
Maximum Raw Water Pump Initial Suction Lift - ft. (m).....	9.4	(2.8)
Maximum Raw Water Pump Initial Discharge Lift - ft. (m).....	32.8	(9.7)
Raw Water Pump Power - HP (kW).....	2.7	(2)
Maximum Raw Water Pressure at Engine Outlet -PSI (kPa).....	15	(103)
Maximum Inlet Restriction at Raw Water Pump - in.Hg (kPa).....	10	(34)
Minimum Raw Water Pipe Size - in. (mm).....	2	(51)

LUBRICATION SYSTEM

Oil Pressure @ Idle Speed - PSI (kPa).....	15 Min	(103) Min
@ Governed Speed - PSI (kPa).....	35-50	(241 - 345)
Maximum Allowable Oil Temperature - °F (°C).....	250	(121)
Maximum Oil Consumption - U.S.qt./h (L/h).....	0.25	(0.24)
Oil Flow - GPM (L/s)	34.9	(2.2)
Oil Pan Capacity - Low / High - U.S. gal. (L).....	7.5 / 9.5	(28.4 / 36.0)
Total System Capacity - U.S. gal. (L).....	10.2	(38.6)
Angularity of Oil Pan - Front Down/Front Up/Side to Side.....	38°/38°/38°	

FUEL SYSTEM

Type Injection System.....	Direct Injection Cummins PT	
Maximum Allowable Restriction to Fuel Pump		
-- With Clean Fuel Filter - in.Hg (kPa).....	4.0	(13.5)
-- With Dirty Fuel Filter - in.Hg (kPa).....	8.0	(27.1)
Maximum Allowable Head on Injector Return Line		
-- With Check Valve - in.Hg (kPa).....	6.5	(22.0)
-- Without Check Valve - in.Hg (kPa).....	2.5	(8.5)
Minimum Fuel Supply Line Size - in. (mm).....	0.625	(16)
Minimum Fuel Return Line Size - in. (mm).....	0.5	(13)
Maximum Fuel Pump Supply - U.S.gal/h (L).....	81	(305)
Fuel Rail Pressure - PSI (kPa).....	165	(1141)
Maximum Fuel Temperature °F (°C).....	160	(71)

ELECTRICAL SYSTEM

Minimum Recommended Battery Capacity (24V)		
-- Cold Soak (No Load) - CCA.....	900	
- Minimum Reserved Capacity - CCA.....	320	
-- Cold Soak (With Load) - CCA.....	900	
- Minimum Reserved Capacity - CCA.....	320	
Maximum Allowable Resistance of Cranking Circuit - ohm.....	0.002	
Standard Cranking Motor (Heavy Duty , Positive Engagement) - volt.....	24	
Standard Battery Charging System , Negative Ground - ampere.....	35	

PERFORMANCE DATA

Idle Speed - r/min	575 - 650	
Maximum No-Load Governed Speed - r/min	1800	
Maximum over Speed Capability - r/min	2700	
Minimum Crankshaft Rotation for unaided Cold Start - r/min.....	150	
Minimum Torque for unaided Cold Start - lb.-ft. (N-m).....	375	(509)
Exhaust Sound Pressure at 1m from Exhaust Outlet -1500r/min -dBA.....	N/A	

All data is based on :

--Engine Operating with fuel system, water pump, lubricating oil pump, air cleaner and exhaust silencer, fan, and optional driven components.

--Engine operating with fuel corresponding to grade No.2-D per **ASTM D975**.

--**ISO 3046**, Part1, Standard Reference Conditions of : Barometric Pressure:100kPa(29.5in.Hg); Altitude: 110m (361ft.); Air Temperature: 25°C (77° F) ; Relative Humidity: 30% .

--This Data Sheet includes both air-cooled (Fan/Radiator) & raw water cooled (Heatexchanger/Raw Water Pump) type engine.

N.A. - Data is Not Available

N/A - Not Applicable to this Engine

TBD - To Be Determined

	Prime Power		Standby Power	
	50Hz		50Hz	
	1500		1500	
Governed Engine Speed - r/min.....	380	(284)	430	(321)
Gross Engine Power Output - HP (kW)	1333	(1808)	1507	(2044)
Torque lb.-ft. (N-m).....	235	(1623)	266	(1834)
Brake Mean Effective Pressure - PSI (kPa)	1500	(7.62)	1500	(7.62)
Piston Speed - ft./min (m/s).....	30	(22)	30	(22)
Friction Horsepower - HP (kW).....	795	(375)	885	(418)
Intake Air Flow - CFM (L/s)	18.0	(68)	20.4	(77)
Fuel Consumption - U.S.gal/h (L/h).....	905	(485)	930	(499)
Exhaust Gas Temperature (After Turbine) - °F (°C).....	2067	(980)	2301	(1090)
Exhaust Gas Flow (After Turbine) - CFM (L/s).....	26.1 : 1		25.7 : 1	
Air to Fuel Ratio.....	1960	(34)	2220	(39)
Heat Radiation - BTU (kW).....	11740	(206)	13320	(234)
Heat Rejection to Coolant - BTU (kW).....	9780	(172)	11100	(195)
Heat Rejection to Ambient - BTU (kW).....				

Engine Model: NTA855-G1B

Data Sheet: DS-819E

Date: 2007-1-25

CHONGQING CUMMINS ENGINE CO. LTD. CHONGQING, CHINA, 400031

All Data is Subject to Change Without Notice - contact CCEC for most recent data . Tel : 86-400-889-9